



MAX PLANCK INSTITUTE
FOR DYNAMICS OF COMPLEX
TECHNICAL SYSTEMS
MAGDEBURG



COMPUTATIONAL METHODS IN
SYSTEMS AND CONTROL THEORY

Otto-von-Guericke Universität Magdeburg
Faculty of Mathematics
Summer term 2017

Model Reduction for Dynamical Systems Lecture 8

Peter Benner and Lihong Feng

Max Planck Institute for Dynamics of Complex Technical Systems
Computational Methods in Systems and Control Theory
Magdeburg, Germany

benner@mpi-magdeburg.mpg.de feng@mpi-magdeburg.mpg.de
<http://www.mpi-magdeburg.mpg.de/csc/teaching/17ss/mor>



Overview

Linearization-based MOR

Quadratic MOR

Bilinearization-based MOR

Variational analysis-based MOR

Trajectory piece-wise linear MOR

Proper orthogonal decomposition (POD)

References




Linearization-based MOR

Original large ODE

$$CdX / dt = f(X) + Bu(t)$$

$$y(t) = LX(t)$$

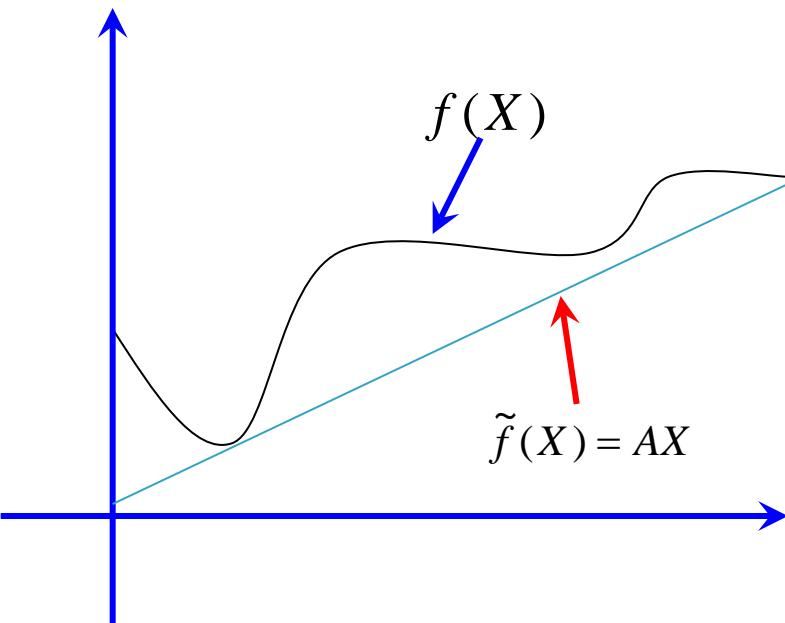

$$M_i = (A^{-1}C)^i r, i = 0, 1, \dots$$

Linearization: approximate
 $f(X)$ by a linear function

Taylor series expansion:

$$f(X) = f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0) + \dots$$

$$\approx f(X_0) + D_f(X - X_0)$$

$$CdX / dt = f(X_0) + D_f(X - X_0) + Bu(t)$$

$$\tilde{y}(t) = LX(t)$$

$$CdX / dt = AX + \underbrace{[B, f(X_0) - D_f X_0]}_{\tilde{B}} \begin{pmatrix} u(t) \\ 1 \end{pmatrix}$$


$$\tilde{y}(t) = LX(t)$$

$$V = \text{orthogonalization}\{r, M_1 r, M_2 r, \dots M_j r\}$$

$$r = A^{-1} \tilde{B}, M_i = [(s_0 C - A)^{-1} C]^i r, i = 0, 1, \dots$$



Example

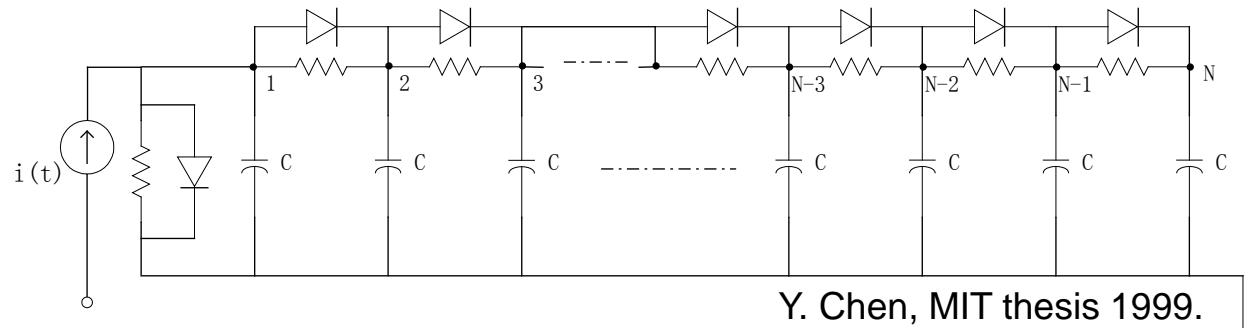

$$\frac{dX}{dt} = \begin{bmatrix} -g(x_1) - g(x_1 - x_2) \\ g(x_1 - x_2) - g(x_2 - x_3) \\ \vdots \\ g(x_{k-1} - x_k) - g(x_k - x_{k+1}) \\ g(x_{n-1} - x_n) \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} u(t),$$

$y(t) = LX(t)$

$$g(x) = e^{40x} + x - 1$$


$$\begin{aligned} g(x) &= g(0) + g'(0)x + \frac{g''(0)}{2!}x^2 + \dots \\ &\approx g(0) + g'(0)x = 41x \end{aligned}$$

$$\frac{dX}{dt} = \begin{bmatrix} -82x_1 + 42x_2 \\ 41x_1 - 82x_2 + 41x_3 \\ \vdots \\ 41x_{k-1} - 82x_k - 41x_{k+1} \\ 41x_{n-1} - 41x_n \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} u(t),$$

$$y(t) = LX(t)$$




Example

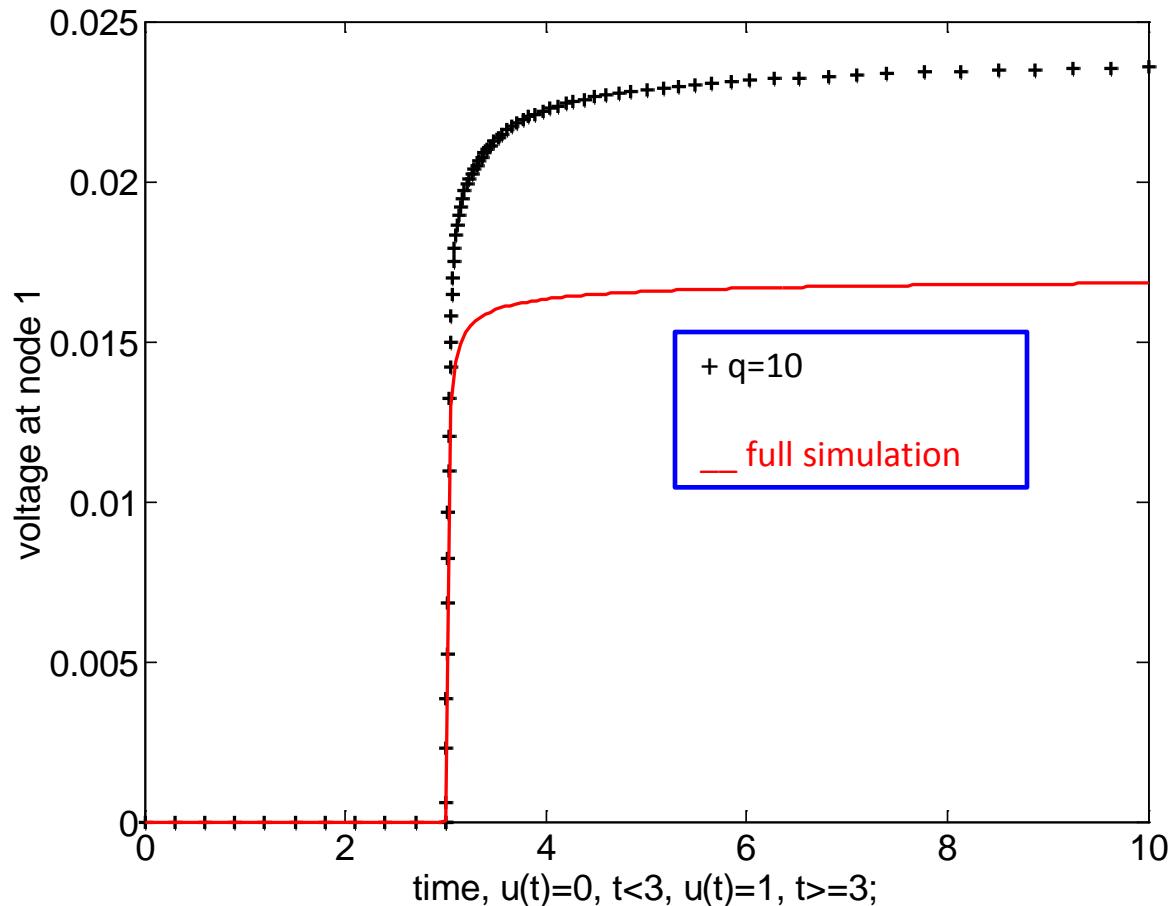




Example

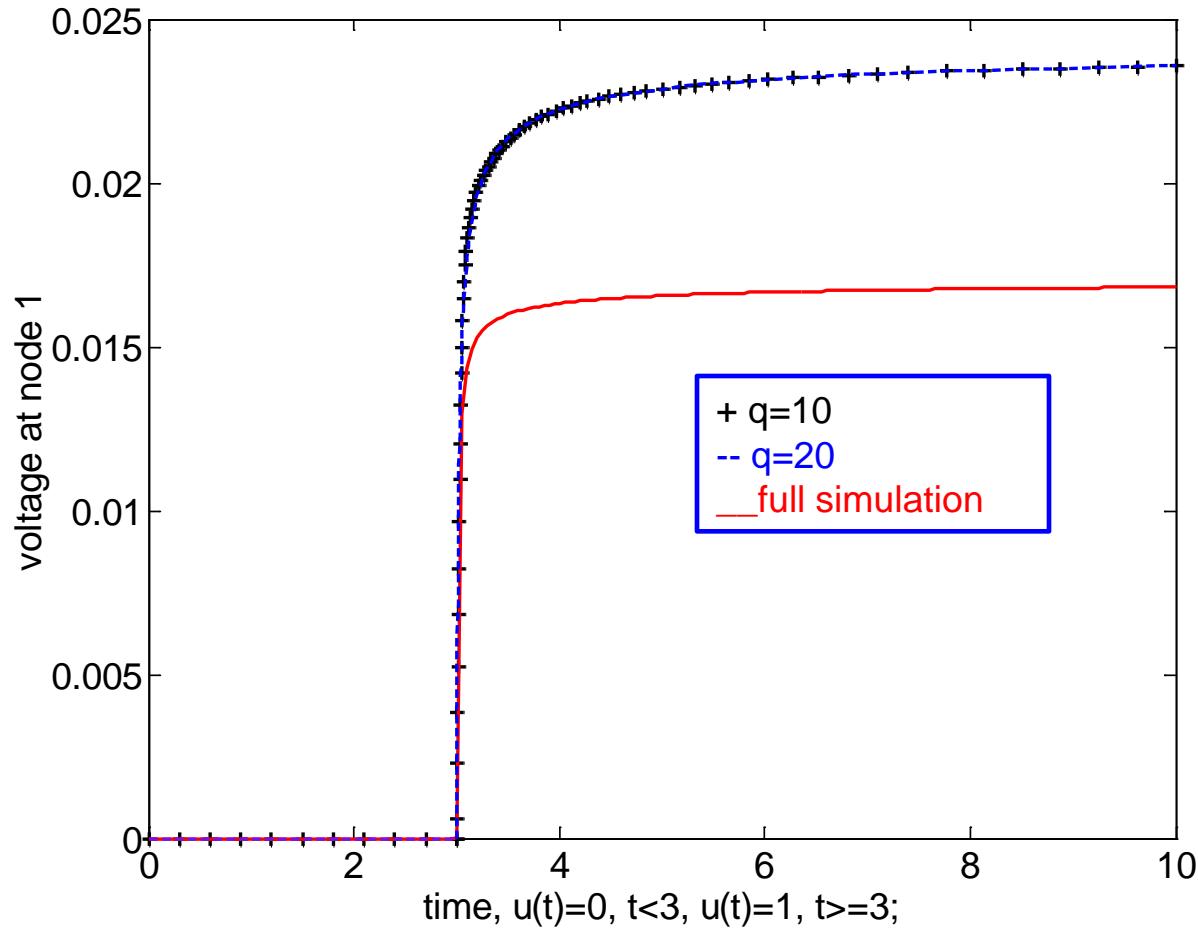



Example

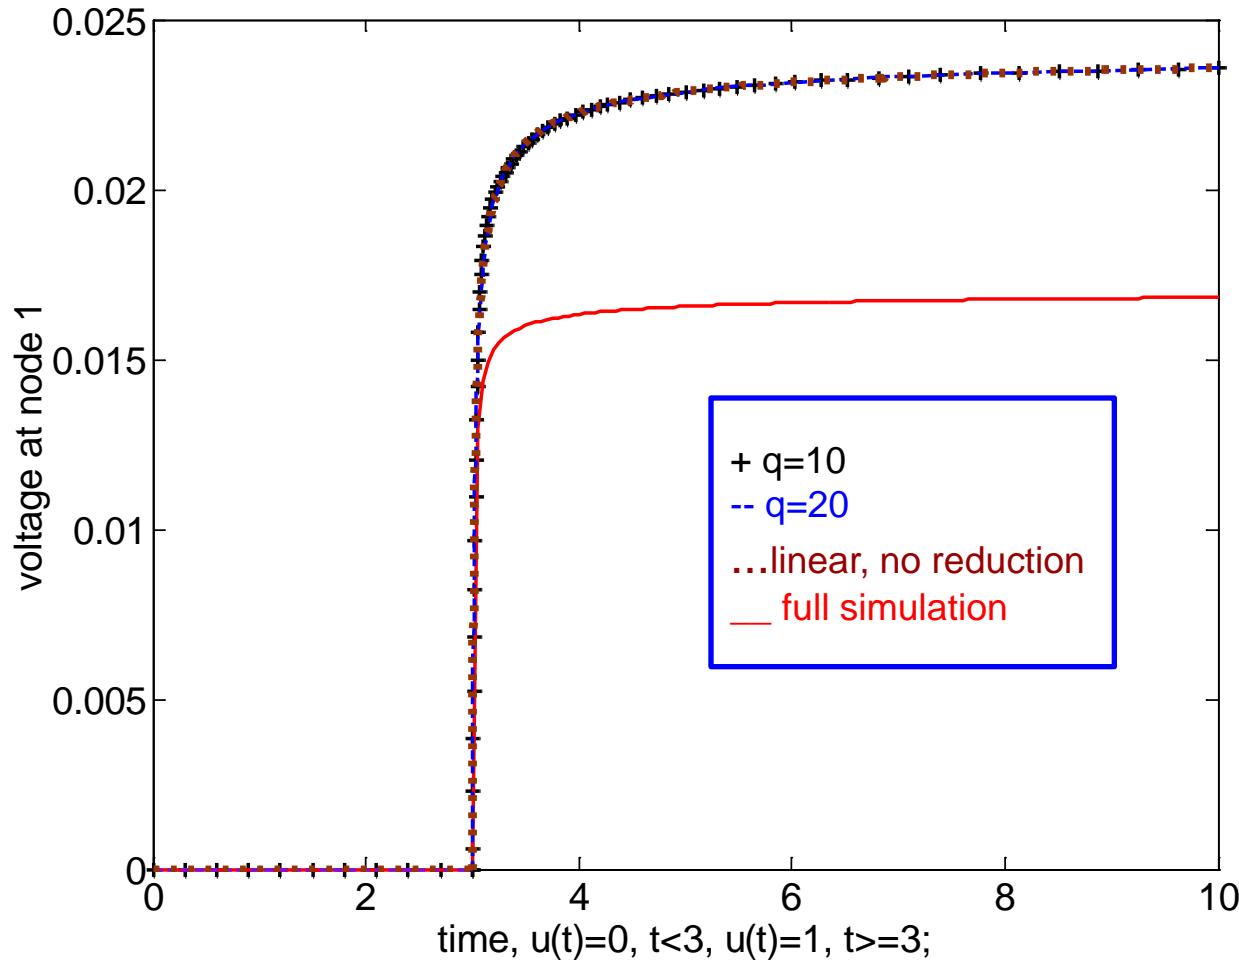




Quadratic MOR

Approximate $f(X)$ by a quadratic polynomial $g(X)$

$$CdX / dt = f(X) + Bu(t)$$

$$y(t) = LX(t)$$

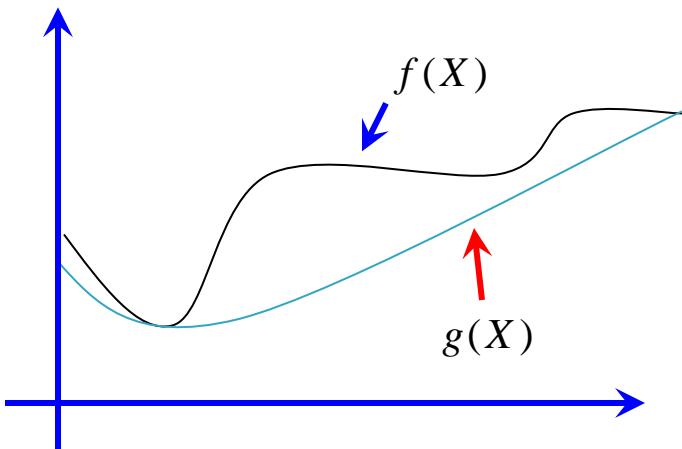

Taylor series expansion:

$$f(X) = f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0) + \dots$$

$$\approx f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0)$$

$$CdX / dt = AX + X^T WX + \tilde{B}u(t)$$

$$\tilde{y}(t) = LX(t)$$

$$X \approx VZ, Z \in R^q, q \ll n$$

$$V^T CXdZ / dt = V^T AVZ + V^T Z^T V^T WVZ + V^T \tilde{B}u(t)$$

$$\hat{y}(t) = LVZ(t)$$

$V = \text{orthogonalization}\{r, M_1 r, M_2 r, \dots, M_j r\}$


$r = (s_0 C - A)^{-1} \tilde{B}, M_i = [(s_0 C - A)^{-1} C]^i r, i = 0, 1, \dots$



Example

$$\frac{dX}{dt} = \begin{bmatrix} -g(x_1) - g(x_1 - x_2) \\ g(x_1 - x_2) - g(x_2 - x_3) \\ \vdots \\ g(x_{k-1} - x_k) - g(x_k - x_{k+1}) \\ g(x_{n-1} - x_n) \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} u(t),$$

$y(t) = LX(t)$

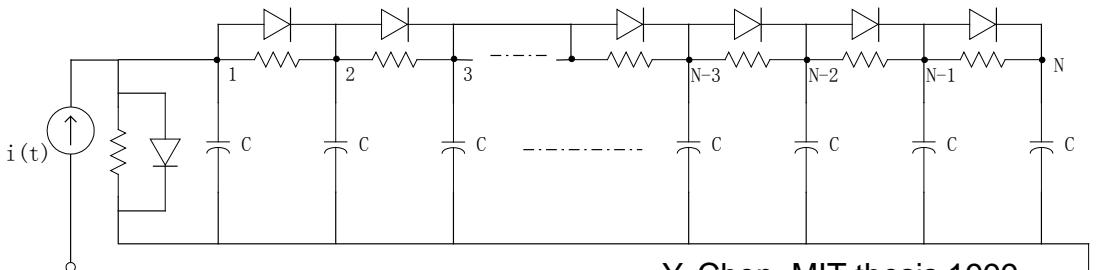

Y. Chen, MIT thesis 1999.

$$g(x) = e^{40x} + x - 1$$

$$g(x) = g(0) + g'(0)x + \frac{g''(0)}{2!}x^2 + \dots$$


$$\approx g(0) + g'(0)x + \frac{g''(0)}{2!}x^2 = 41x + 800x^2$$

$$\frac{dX}{dt} = \begin{bmatrix} -82x_1 + 42x_2 \\ 41x_1 - 82x_2 + 41x_3 \\ \vdots \\ 41x_{k-1} - 82x_k - 41x_{k+1} \\ 41x_{n-1} - 41x_n \end{bmatrix} + \begin{bmatrix} -800x_1^2 - 800(x_1 - x_2)^2 \\ 800(x_1 - x_2)^2 - 800(x_2 - x_3)^2 \\ \vdots \\ 800(x_{k-1} - x_k)^2 - 800(x_k - x_{k+1})^2 \\ \vdots \\ 800(x_{n-1} - x_n)^2 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} u(t),$$

$y(t) = LX(t)$




Example

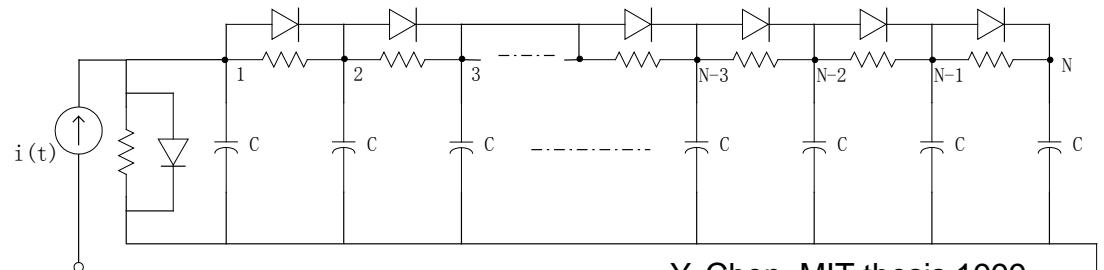

Y. Chen, MIT thesis 1999.

$$\frac{dX}{dt} = \begin{bmatrix} -82x_1 + 42x_2 \\ 41x_1 - 82x_2 + 41x_3 \\ \vdots \\ 41x_{k-1} - 82x_k - 41x_{k+1} \\ 41x_{n-1} - 41x_n \end{bmatrix} + \begin{bmatrix} -800x_1^2 - 800(x_1 - x_2)^2 \\ 800(x_1 - x_2)^2 - 800(x_2 - x_3)^2 \\ \vdots \\ 800(x_{k-1} - x_k)^2 - 800(x_k - x_{k+1})^2 \\ \vdots \\ 800(x_{n-1} - x_n)^2 \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix} u(t),$$

$$y(t) = LX(t)$$



$$CdX / dt = AX + X^T WX + \tilde{B}u(t)$$

$$\tilde{y}(t) = LX(t)$$

W is a tensor, it has n matrices, the i th matrix corresponds to the i th element of the nonlinear vector.




Example

W

$$W^1 \in R^{n \times n} = \begin{pmatrix} -1600 & 800 & 0 & \cdots & 0 \\ 800 & -800 & 0 & \cdots & 0 \\ 0 & 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & \cdots & 0 & 0 & 0 \end{pmatrix}$$

$$W^i \in R^{n \times n} = \begin{pmatrix} 0 & 0 & 0 & \cdots & 0 & 0 \\ \ddots & \vdots & \vdots & & \ddots & \vdots \\ & 800 & -800 & 0 & 0 & 0 \\ \vdots & -800 & 0 & 800 & 0 & 0 \\ & 0 & 800 & -800 & 0 & 0 \\ & 0 & 0 & 0 & 0 & 0 \\ \vdots & \ddots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & 0 & \cdots & 0 & 0 \\ & i-1, & i, & i+1 & & & \end{pmatrix}$$

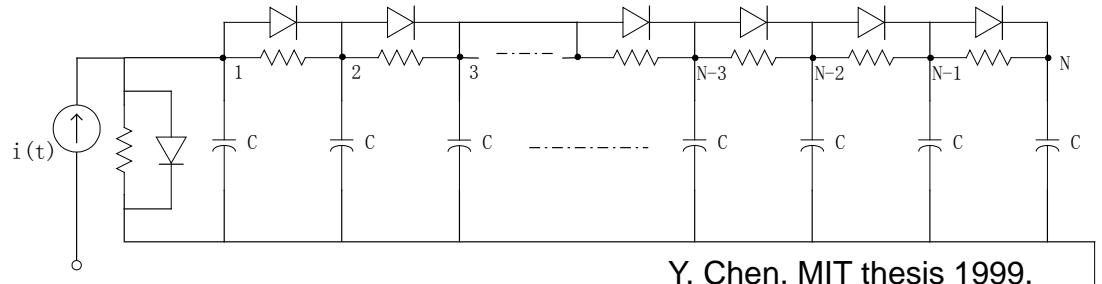


Y. Chen, MIT thesis 1999.

$$W^n \in R^{n \times n} = \begin{pmatrix} 0 & 0 & 0 & \cdots & 0 \\ 0 & \ddots & 0 & \cdots & \vdots \\ 0 & 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & 800 & -800 \\ 0 & \cdots & 0 & -800 & 800 \end{pmatrix}$$

$$X^T W X = \begin{bmatrix} X^T W^1 X \\ \vdots \\ X^T W^i X \\ \vdots \\ X^T W^n X \end{bmatrix} \xrightarrow{\text{blue arrow}} Z^T V^T W V Z = \begin{bmatrix} Z^T V^T W^1 V Z \\ \vdots \\ Z^T V^T W^i V Z \\ \vdots \\ Z^T V^T W^n V Z \end{bmatrix}$$




Example

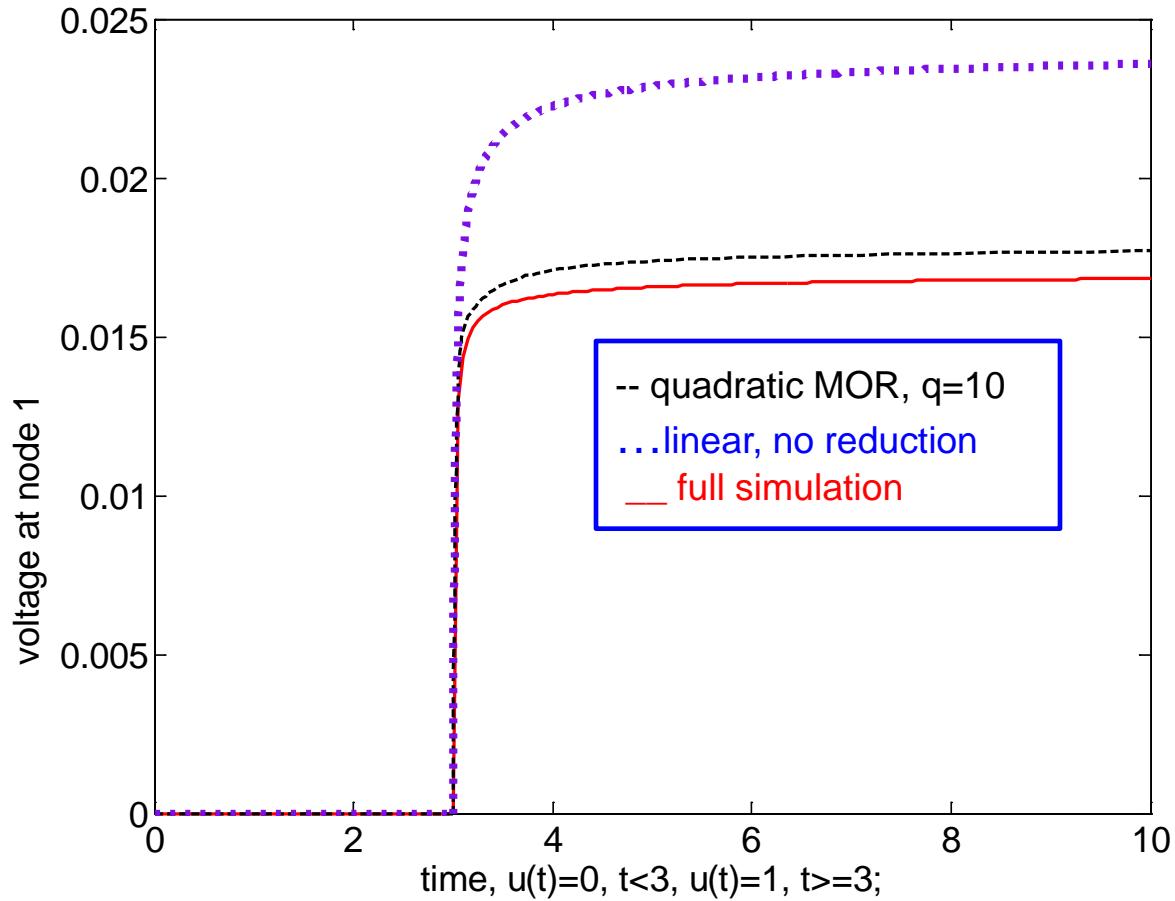




Example

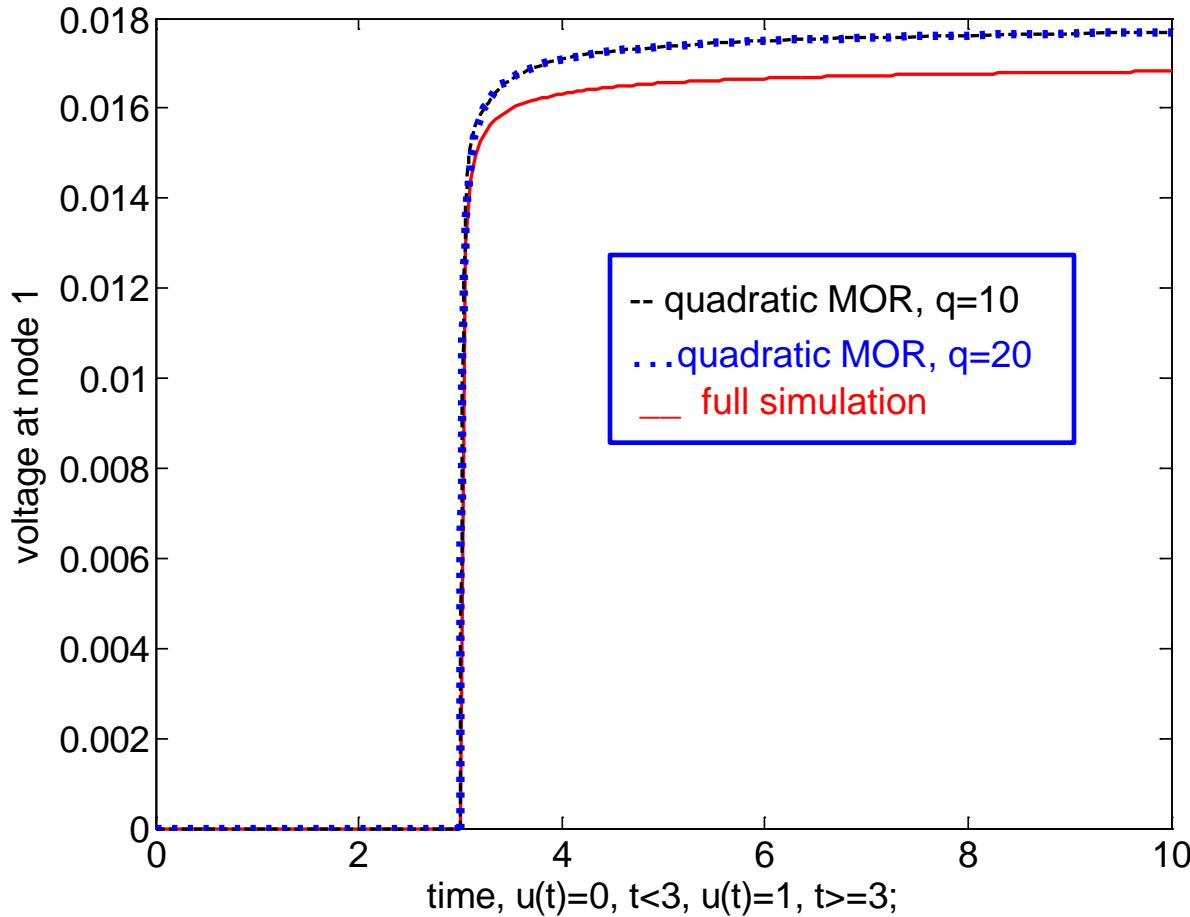



Example

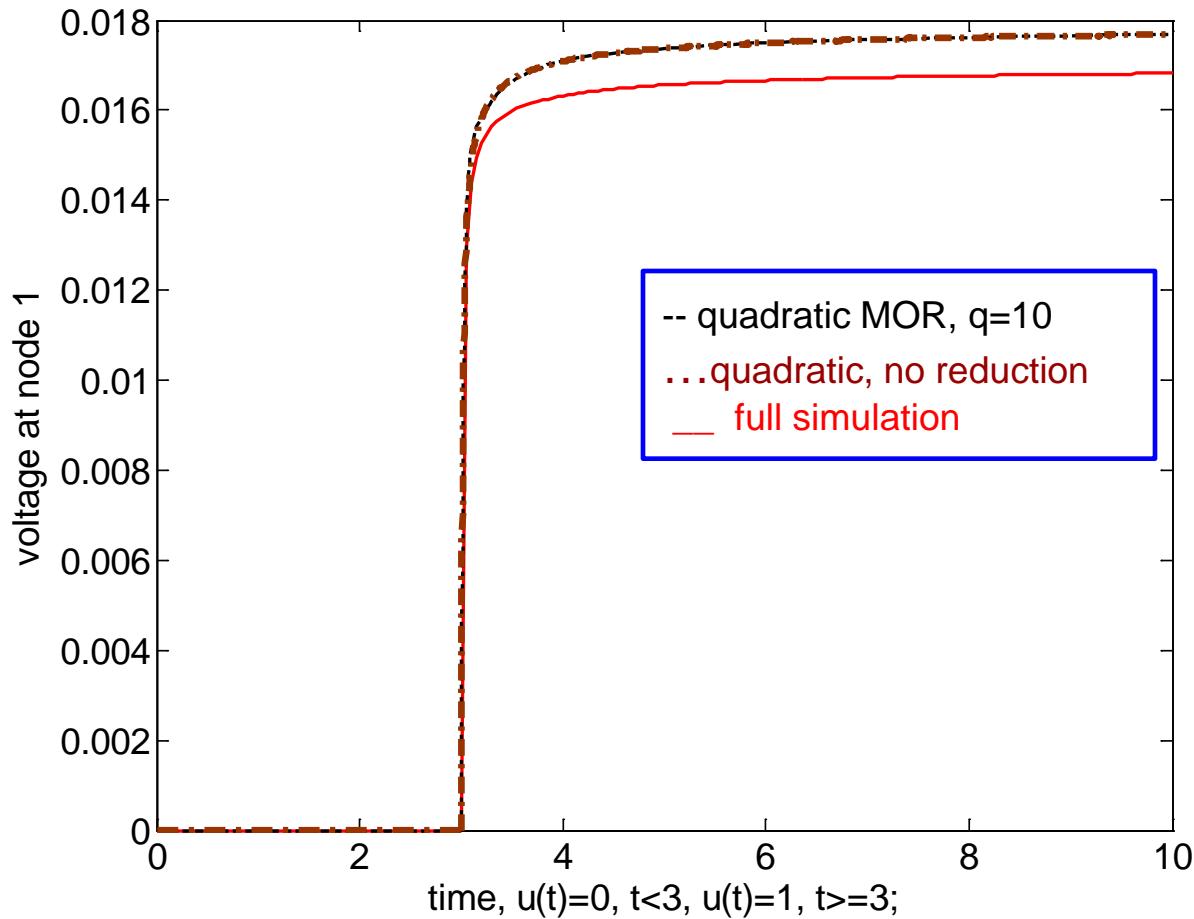



Bilinearization-based MOR

Approximate $f(X)$ by quadratic polynomial $g(X)$, but written into Kronecker product

Taylor series expansion:


$$dX / dt = f(X) + Bu(t)$$

$$y(t) = LX(t)$$

$$f(X) = f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0) + \dots$$

$$\approx f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0)$$

$$= f(X_0) + A_1 X + A_2 X \otimes X$$

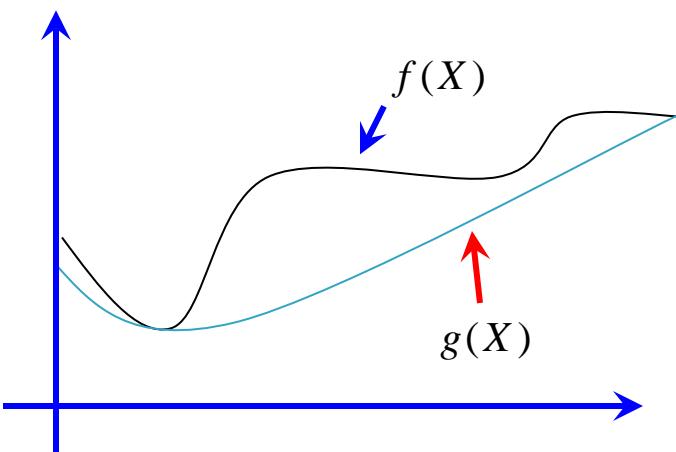

$$dX^\otimes / dt = A^\otimes X^\otimes + N^\otimes X^\otimes u(t) + B^\otimes u(t)$$

$$y(t) = L^\otimes X^\otimes(t)$$

$$\boxed{X^\otimes \in R^N, N \approx n^2}$$
$$X^\otimes \approx VZ, Z \in R^q, q \ll n$$

$$dZ / dt = V^T A^\otimes VZ + V^T N^\otimes VZ u(t) + V^T B^\otimes u(t)$$

$$\hat{y}(t) = LVZ(t)$$



Bilinearization-based MOR

$$\begin{array}{l} dX/dt = f(X) + Bu(t) \\ y(t) = LX(t) \end{array} \xrightarrow{\text{Carleman bilinearization}} \begin{array}{l} dX^\otimes/dt = A^\otimes X^\otimes + N^\otimes X^\otimes u(t) + B^\otimes u(t) \\ y(t) = L^\otimes X^\otimes(t) \end{array}$$

$$A^\oplus = \begin{pmatrix} A_1 & A_2 \\ 0 & A_1 \otimes I + I \otimes A_1 \end{pmatrix} \quad N^\oplus = \begin{pmatrix} 0 & 0 \\ B \otimes I + I \otimes B & 0 \end{pmatrix}$$

$$X^\otimes = \begin{pmatrix} X \\ X \otimes X \end{pmatrix} \quad B^\otimes = \begin{pmatrix} B \\ 0 \end{pmatrix} \quad L^\otimes = [L \quad 0]$$

Carleman bilinearization:

Kronecker product

$$A \otimes B = \begin{pmatrix} a_{11}B & \cdots & a_{1n}B \\ \vdots & \ddots & \vdots \\ a_{m1}B & \cdots & a_{mn}B \end{pmatrix}$$

[1] W.J. Rugh, Nonlinear System Theory, The John Hopkins University Press, Baltimore, 1981.

[2] S. Sastry, Nonlinear Systems: Analysis, Stability and Control, Springer, New York, 1999.



Bilinearization-based MOR

How to compute V?

$$\begin{aligned} dX^{\otimes} / dt &= A^{\otimes} X^{\otimes} + N^{\otimes} X^{\otimes} u(t) + B^{\otimes} u(t) \\ y(t) &= L^{\otimes} X^{\otimes}(t) \end{aligned}$$

Volterra series expression of bilinear system

According to the theory in [Rugh 1981], the output response of the bilinear system can be expressed into Volterra series,

$$y(t) = \sum_{n=1}^{\infty} y_n(t)$$

$$y_n(t) = \int_0^t \cdots \int_0^t h_n^{(reg)}(t_1, t_2, \dots, t_n) u(t - t_1 - t_2 - \cdots - t_n) \cdots u(t - t_n) dt_1 \cdots dt_n$$

$$h_n^{(reg)}(t_1, t_2, \dots, t_n) = L^{\otimes T} e^{A^{\otimes} t_n} N^{\otimes} e^{A^{\otimes} t_{n-1}} \cdots N^{\otimes} e^{A^{\otimes} t_1} B^{\otimes}$$

Laplace transform (drop \otimes for simplicity):

$$\begin{aligned} h_n^{(reg)}(s_1, s_2, \dots, s_n) &= L^T (s_n I - A)^{-1} N (s_{n-1} I - A)^{-1} N \cdots (s_2 I - A)^{-1} N (s_1 I - A)^{-1} B \\ &= (-1)^n L^T (I - s_n A^{-1})^{-1} A^{-1} N (I - s_{n-1} A^{-1})^{-1} A^{-1} N \cdots (I - s_2 A^{-1})^{-1} A^{-1} N (I - s_1 A^{-1})^{-1} A^{-1} B \end{aligned}$$



Bilinearization-based MOR

How to compute V ?

$$\begin{aligned} dX^\otimes / dt &= A^\otimes X^\otimes + N^\otimes X^\otimes u(t) + B^\otimes u(t) \\ y(t) &= L^\otimes X^\otimes(t) \end{aligned}$$

Laplace transform:

$$\begin{aligned} h_n^{(reg)}(s_1, s_2, \dots, s_n) &= L(s_n I - A)^{-1} N(s_{n-1} I - A)^{-1} N \cdots (s_2 I - A)^{-1} N(s_1 I - A)^{-1} B \\ &= (-1)^n L^T (I - s_n A^{-1})^{-1} A^{-1} N(I - s_{n-1} A^{-1})^{-1} A^{-1} N \cdots (I - s_2 A^{-1})^{-1} A^{-1} N(I - s_1 A^{-1})^{-1} A^{-1} B \end{aligned}$$

$$(I - s_n A^{-1})^{-1} = I + A^{-1} s_n + \cdots + A^{-i} s_n^i + \cdots$$



$$h_n^{(reg)}(s_1, s_2, \dots, s_n) = \sum_{l_n=1}^{\infty} \cdots \sum_{l_1=1}^{\infty} (-1)^n s_n^{l_n-1} \cdots s_1^{l_1-1} \underline{LA^{-l_n} NA^{-l_{n-1}} N \cdots A^{-l_1} B}$$



Moments:

$$m(l_n, \dots, l_1) = (-1)^n LA^{-l_n} NA^{-l_{n-1}} N \cdots A^{-l_1} B$$



Bilinearization-based MOR

How to compute V ?

$$\begin{aligned} dX^{\otimes} / dt &= A^{\otimes} X^{\otimes} + N^{\otimes} X^{\otimes} u(t) + B^{\otimes} u(t) \\ y(t) &= L^{\otimes} X^{\otimes}(t) \end{aligned}$$

$$h_n^{(reg)}(s_1, s_2, \dots, s_n) = \sum_{l_n=1}^{\infty} \cdots \sum_{l_1=1}^{\infty} (-1)^n s_n^{l_n-1} \cdots s_1^{l_1-1} \underline{LA^{-l_n} NA^{-l_{n-1}} N \cdots A^{-l_1} B}$$



Multimoments:

$$m(l_n, \dots, l_1) = (-1)^n LA^{-l_n} NA^{-l_{n-1}} N \cdots A^{-l_1} B$$

$$\text{range}\{V_1\} = K_{q_1}\{A^{-1}, A^{-1}B\} = \text{span}\{A^{-1}B, \dots, A^{-q_1}B\}$$

\vdots

$$\text{range}\{V_j\} = K_{q_j}\{A^{-1}, A^{-1}NV_{j-1}\} = \text{span}\{A^{-1}NV_{j-1}, A^{-2}NV_{j-1}, \dots, A^{-q_j}NV_{j-1}\}$$


$$\text{range}\{V\} = \text{colspan}\{V_1, \dots, V_J\}$$

Reduced model:

$$\begin{aligned} dZ / dt &= V^T A^{\otimes} V Z + V^T N^{\otimes} V Z u(t) + V^T B^{\otimes} u(t) \\ \hat{y}(t) &= L V Z(t) \end{aligned}$$



Example

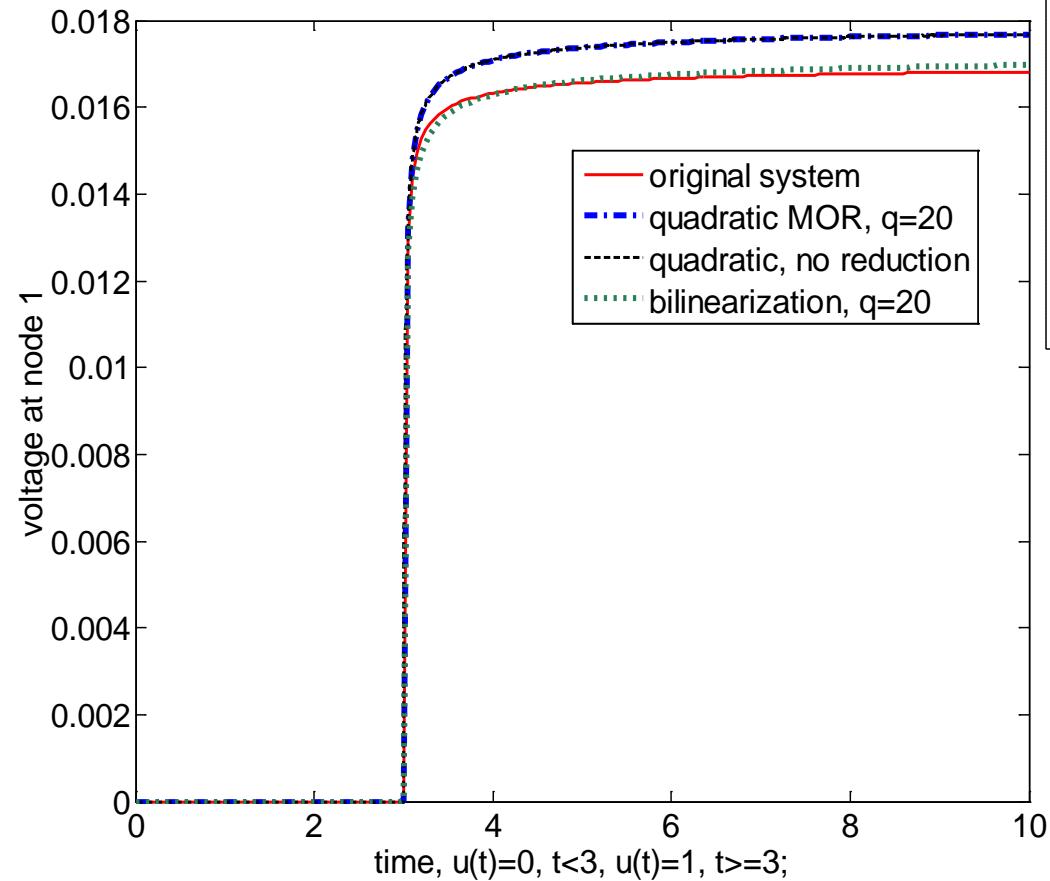

V for bilinearization MOR:

$$\text{range}\{V\} = \text{colspan}\{V_1, V_2\}$$

$$\text{range}\{V_1\} = \text{span}\{(A^\otimes)^{-1}B, \dots, (A^\otimes)^{-19}B\}$$

$$\text{range}\{V_2\} = \text{span}\{(A^\otimes)^{-1}NV_1(:,1)\}$$

V for quadratic MOR:

$$\text{range}\{V\} = \text{span}\{A^{-1}B, \dots, A^{-20}B\}$$



Variational analysis-based MOR

Original system:

$$dX / dt = f(X) + Bu(t)$$

$$y(t) = LX(t)$$

Taylor series expansion:

$$\begin{aligned} f(X) &= f(X_0) + D_f(X - X_0) + \frac{1}{2}(X - X_0)^T H_f(X_0)(X - X_0) + \dots \\ &\approx f(X_0) + A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \dots \end{aligned}$$

$$\begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + \tilde{B}\tilde{u}(t) \\ y(t) &= LX(t) \end{aligned}$$

or

$$\begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \tilde{B}\tilde{u}(t) \\ y(t) &= LX(t) \end{aligned}$$

Variational analysis:

$$\begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + \tilde{B}\alpha\tilde{u}(t) \\ y(t) &= LX(t) \end{aligned}$$

or

$$\begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \tilde{B}\alpha\tilde{u}(t) \\ y(t) &= LX(t) \end{aligned}$$

→ $X(\alpha, t) = X(\alpha = 0, t) + \alpha X_1(t) + \alpha^2 X_2(t) + \alpha^3 X_3(t) + \dots$

Assume: $X(t) = 0$, if $u(t) = 0$, so that $X(\alpha = 0, t) = 0$.



Variational analysis-based MOR

Variational analysis [11]:

$$\begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \tilde{B} \alpha \tilde{u}(t) \\ y(t) &= L X(t) \end{aligned} \quad \xrightarrow{\hspace{1cm}} \quad X(t) = \alpha X_1(t) + \alpha^2 X_2(t) + \alpha^3 X_3(t) + \dots$$

$$\begin{aligned} d(\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots) / dt &= A_1(\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots) \\ &+ A_2[(\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots) \otimes (\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots)] \\ &+ A_3[(\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots) \otimes (\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots) \otimes (\alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 + \dots)] + \tilde{B} \alpha \tilde{u}(t) \\ y(t) &= L X(t) \end{aligned}$$

$$\alpha : \quad dX_1(t) / dt = A_1 X_1(t) + \tilde{B} \tilde{u}(t)$$

$$\alpha^2 : \quad dX_2(t) / dt = A_1 X_2(t) + A_2(X_1 \otimes X_1)$$

$$\alpha^3 : \quad dX_3(t) / dt = A_1 X_3(t) + A_2(X_1 \otimes X_2 + X_2 \otimes X_1) + A_3(X_1 \otimes X_1 \otimes X_1)$$
$$\vdots$$



Variational analysis-based MOR

Variational analysis:

$$\begin{aligned} dX/dt &= A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \tilde{B} \alpha \tilde{u}(t) \\ y(t) &= L X(t) \end{aligned} \quad \longrightarrow \quad X(t) = \alpha X_1(t) + \alpha^2 X_2(t) + \alpha^3 X_3(t) + \dots$$

$$\alpha: \quad dX_1(t)/dt = A_1 X_1(t) + \tilde{B} \tilde{u}(t)$$

$$\alpha^2: \quad dX_2(t)/dt = A_1 X_2(t) + A_2 (X_1 \otimes X_1)$$

$$\begin{aligned} \alpha^3: \quad dX_3(t)/dt &= A_1 X_3(t) + A_2 (X_1 \otimes X_2 + X_2 \otimes X_1) + A_3 (X_1 \otimes X_1 \otimes X_1) \\ &\vdots \end{aligned}$$

$$X_1 \approx V_1 Z_1 \quad V_1 = \text{span}\{A_1^{-1} \tilde{B}, \dots, A_1^{-q_1} \tilde{B}\}$$

$$X_2 \approx V_2 Z_2 \quad V_2 = \text{span}\{A_1^{-1} A_2, \dots, A_1^{-q_2} A_2\}$$

$$X_3 \approx V_3 Z_3 \quad V_3 = \text{span}\{A_1^{-1} [A_2, A_3], \dots, A_1^{-q_2} [A_2, A_3]\}$$

$$\begin{aligned} X(t) &= \alpha X_1(t) + \alpha^2 X_2(t) + \alpha^3 X_3(t) + \dots \\ &\approx \alpha X_1 + \alpha^2 X_2 + \alpha^3 X_3 \\ &\approx \alpha V_1 Z_1 + \alpha^2 V_2 Z_2 + \alpha^3 V_3 Z_3 \\ &\quad \updownarrow \\ X(t) &\approx \in \text{span}\{V_1, V_2, V_3\} \end{aligned}$$



Variational analysis-based MOR

Original system:

$$\begin{aligned} dX / dt &= f(X) + Bu(t) \\ y(t) &= LX(t) \end{aligned} \quad \approx \quad \begin{aligned} dX / dt &= A_1 X + A_2 X \otimes X + A_3 X \otimes X \otimes X + \tilde{B}\tilde{u}(t) \\ y(t) &= LX(t) \end{aligned}$$




$$X(t) \approx \in \text{span}\{V_1, V_2, V_3\}$$

Compute V : $\text{range}(V) = \text{span}\{V_1, V_2, V_3\}$ $X(t) \approx VZ$

Reduced model: $dZ / dt = V^T A_1 VZ + V^T A_2 VZ \otimes VZ + V^T A_3 VZ \otimes VZ \otimes VZ + V^T \tilde{B}\tilde{u}(t)$
 $\hat{y}(t) = LVZ(t)$



Example

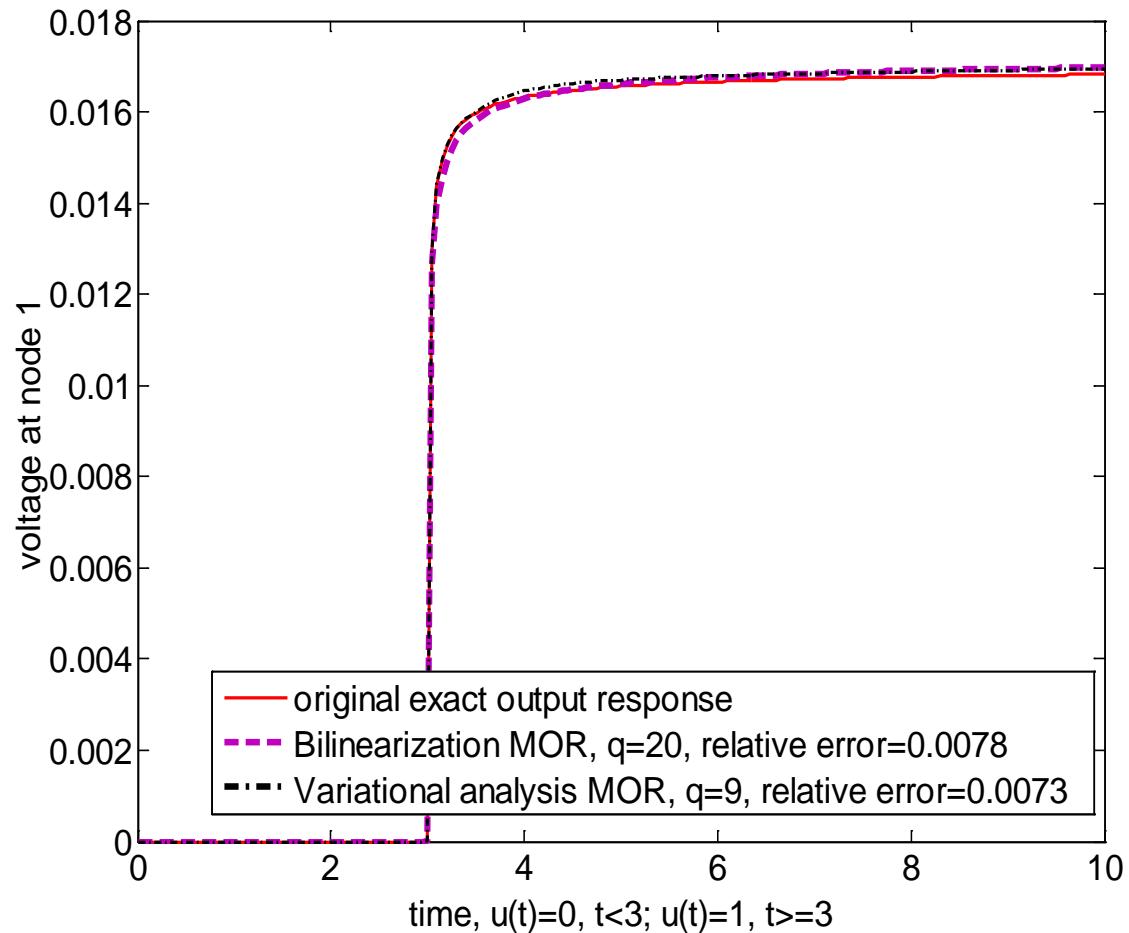

V for bilinearization MOR:

$$\text{range}\{V\} = \text{colspan}\{V_1, V_2\}$$

$$\text{range}\{V_1\} = \text{span}\{(A^\otimes)^{-1}B, \dots, (A^\otimes)^{-19}B\}$$

$$\text{range}\{V_2\} = \text{span}\{A^{-1}NV(:,1)\}$$

V for Variational analysis MOR:

$$\text{range}\{V_1\} = \text{span}\{A_1^{-1}B, \dots, A^{-4}B\}$$


$$V_2^0 = \text{orth}\{A_2\}$$

$$\text{range}\{V_2\} = \text{span}\{A_1^{-1}V_2^0(:,1:6)\}$$

$$\text{range}\{V\} = \text{span}\{V_1, V_2\}$$



Example

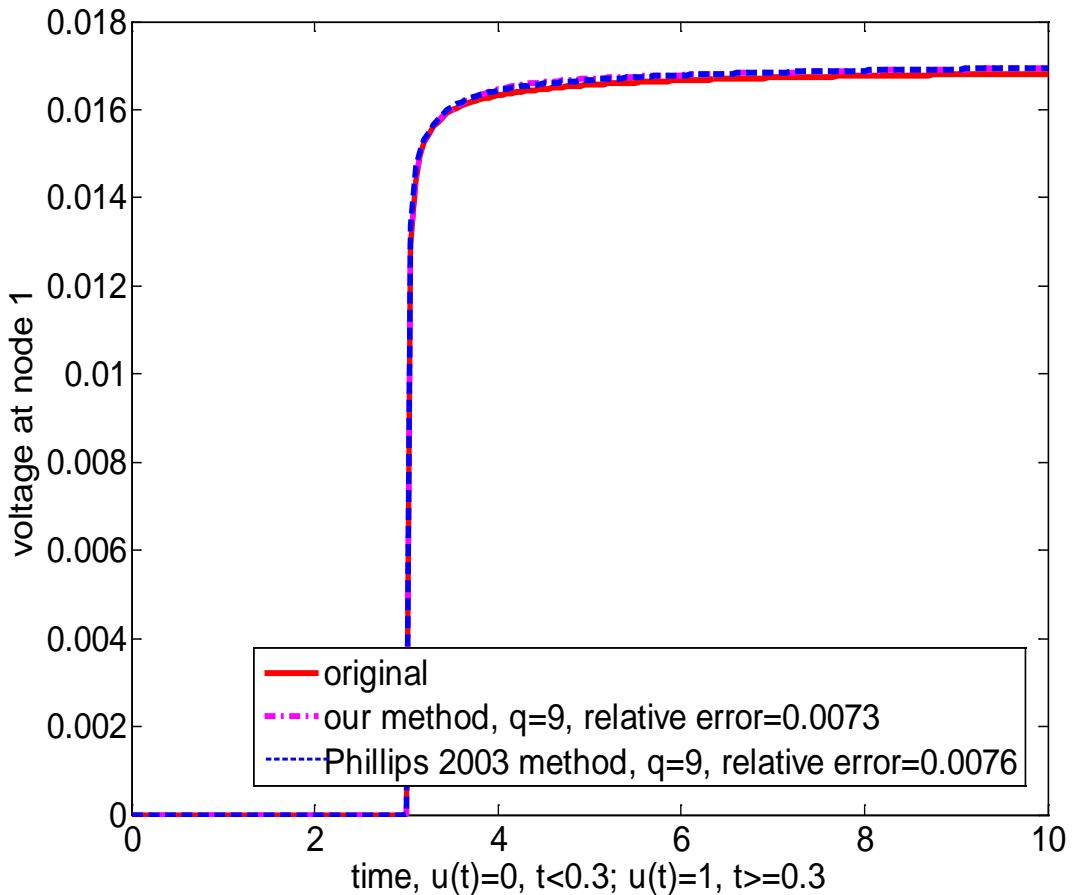

V for [Phillips 2000] method:

$$\begin{aligned}\text{range}\{V_1\} &= \text{span}\{A_1^{-1}B, \dots, A^{-4}B\} \\ V_2^0 &= A^{-1}A_2(V_1 \otimes V_1) \\ \text{range}\{V_2\} &= \text{span}\{V_2^0(:,1:6)\} \\ \text{range}\{V\} &= \text{span}\{V_1, V_2\}\end{aligned}$$

V for our method [Feng 2014]:


$$\begin{aligned}\text{range}\{V_1\} &= \text{span}\{A_1^{-1}B, \dots, A^{-4}B\} \\ V_2^0 &= \text{orth}\{A_2\} \\ \text{range}\{V_2\} &= \text{span}\{A_1^{-1}[V_2^0(:,1:6)]\} \\ \text{range}\{V\} &= \text{span}\{V_1, V_2\}\end{aligned}$$



Trajectory piece-wise linear MOR

Original system:


$$\begin{aligned} dX / dt &= f(X) + Bu(t) \\ y(t) &= LX(t) \end{aligned}$$



$$dX / dt = \sum_{i=0}^{s-1} w_i g_i(X) + Bu,$$

$$y(t) = LX(t)$$

$$g_i(X) = f(X_i) + A_i(X - X_i), \quad i = 0, 1, \dots, s-1$$

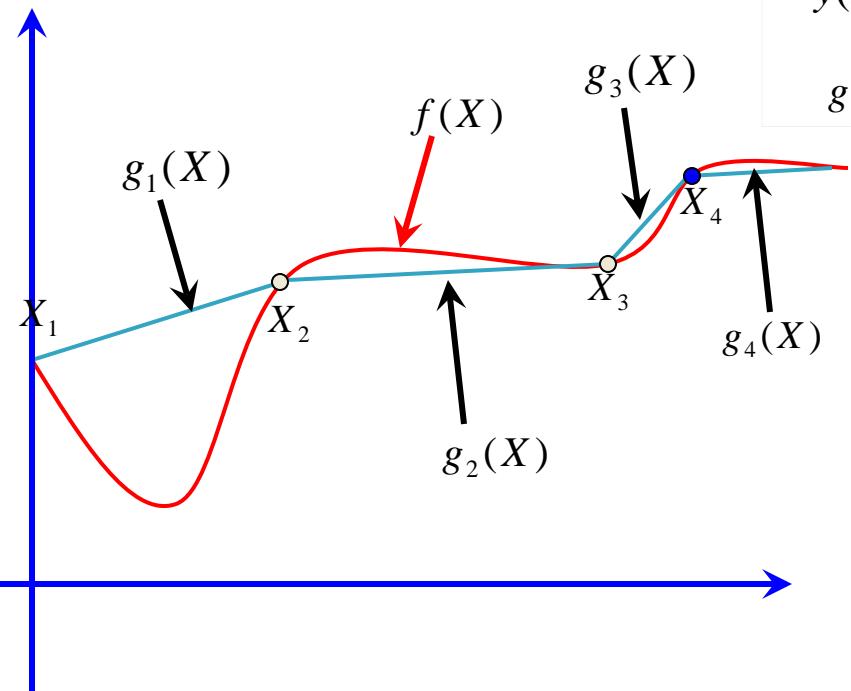


$$A_i = (a_{jk}), \quad a_{jk} = \left. \frac{\partial f_j(X)}{\partial x_k} \right|_{X_i}$$



Trajectory piece-wise linear MOR

Original system:

$$\begin{aligned} dX / dt &= f(X) + Bu(t) \\ y(t) &= LX(t) \end{aligned}$$



$$dX / dt = \sum_{i=0}^{s-1} w_i g_i(X) + Bu,$$

$$y(t) = LX(t)$$

$$\begin{aligned} g_i(X) &= f(X_i) + A_i(X - X_i), \quad i = 0, 1, \dots, s-1 \\ &= A_i X + (f(X_i) - A_i X_i) \end{aligned}$$

How to compute V ?

$$\text{range}\{V_i\} = \text{span}\{A_i^{-1} \tilde{B}_i, \dots, A_i^{-q_i} \tilde{B}_i\} \quad i = 0, 1, \dots, s-1$$

$$\text{range}\{V\} = \text{span}\{V_1, \dots, V_{s-1}\}$$



$$dX / dt = \sum_{i=0}^{s-1} (w_i A_i X + B_i w_i) + Bu(t),$$

$$y(t) = LX(t)$$


$$\tilde{B}_i = [B, B_i], B_i = f(X_i) - A_i X_i$$



Trajectory piece-wise linear MOR


Original system:

$$\begin{aligned} dX / dt &= f(X) + Bu(t) \\ y(t) &= LX(t) \end{aligned}$$



Trajectory piece-wise linear system:

$$\begin{aligned} dX / dt &= \sum_{i=0}^{s-1} (w_i A_i X + B_0 w_i) + Bu(t), \\ y(t) &= LX(t) \end{aligned}$$



Reduced model:

$$\begin{aligned} dZ / dt &= \sum_{i=0}^{s-1} (w_i V^T A_i V Z + V^T B_0 w_i + V^T B u(t)), \\ \hat{y}(t) &= L V Z(t) \end{aligned}$$



Proper orthogonal decomposition (POD)

POD and SVD

SVD: For any matrix $Y \in R^{m \times n}$, there exist $U = (u_1, \dots, u_m) \in R^{m \times m}$ and $V = (v_1, \dots, v_n) \in R^{n \times n}$, s.t.

$$Y = U\Sigma V^T \quad \text{or} \quad U^T Y V = \begin{pmatrix} D & 0 \\ 0 & 0 \end{pmatrix} := \Sigma \in R^{m \times n}$$

Here, $D = \text{diag}(\sigma_1, \dots, \sigma_d)$. Let U^d and V^d be the matrices including the first d columns of U and V respectively.

It is obvious, $Y = (y_1, \dots, y_n) = U^d D(V^d)^T$

$$\begin{aligned} \Rightarrow y_j &= \sum_{i=1}^d u_i (D(V^d)^T)_{ij} = \sum_{i=1}^d (D(V^d)^T)_{ij} u_i = \sum_{i=1}^d ((U^d)^T U^d D(V^d)^T)_{ij} u_i \\ &= \sum_{i=1}^d ((U^d)^T Y)_{ij} u_i = \sum_{i=1}^d \left(\sum_{k=1}^m U_{ki}^d Y_{kj} \right) u_i = \sum_{i=1}^d \langle y_j, u_i \rangle_{R^m} u_i = \sum_{i=1}^d \langle u_i, y_j \rangle_{R^m} u_i. \end{aligned}$$

Y can be represented in terms of d linearly independent columns of U^d .



Proper orthogonal decomposition (POD)

Definition For $l \in \{1, \dots, d\}$, the vectors $\{u_i\}_{i=1}^l$ are called POD basis of rank l .

The POD basis $\{u_i\}_{i=1}^l$ is optimal, among all rank l approximations,
in approximating the columns of Y :

$$\{u_i\}_{i=1}^l = \arg \min_{\tilde{u}_1, \dots, \tilde{u}_l \in R^m} \sum_{j=1}^n \varepsilon_j \quad \text{s.t. } \langle \tilde{u}_i, \tilde{u}_j \rangle_{R^m} = \delta_{ij}, 1 \leq i, j \leq l.$$

$$\text{Here, } \varepsilon_j = \| y_j - \sum_{i=1}^l \langle y_j, \tilde{u}_i \rangle_{R^m} \tilde{u}_i \|_{R^m}^2$$



Model Order Reduction using POD

Algorithm MOR using POD

1. Solve the original nonlinear system to get the snapshots

$$X = (x_{t_1}, \dots, x_{t_N})$$

2. Get the POD vectors of rank q from SVD of X

$$X = \tilde{U} \Sigma \tilde{V}^T, V = (\tilde{u}_1, \dots, \tilde{u}_q)$$

3. Use V to get the ROM

$$V^T E V \frac{dz(t)}{dt} = V^T f(Vz(t)) + V^T Bu(t)$$

How to deal with $f(Vz(t))$?

An effective way is to approximate the nonlinear function by projecting it onto a subspace with dimension $l \ll n$, that approximates the subspace spanned by the snapshots of the nonlinear function.

$$f(x(t)t) \approx U^f c(t), U^f = (u_1^f, \dots, u_l^f)$$



To determine $c(t)$, we require that $U^f c(t)$ interpolates $f(t)$ at $l \ll n$ points :

This is equivalent to : find a matrix

$$P = [e_{\wp_1}, \dots, e_{\wp_l}] \in R^{n \times m}, \text{ s.t. } P^T f(t) = P^T U^f c(t).$$

Suppose $P^T U$ is nonsingular, then

$$P^T f(t) = P^T U^f c(t) \Rightarrow c(t) = (P^T U^f)^{-1} P^T f(t)$$

so that,

$$f(t) \approx U^f c(t) = U^f (P^T U^f)^{-1} P^T f(t).$$

How to compute U and how to specify the indices $\wp_i, i = 1, \dots, l$?

Compute U :

1. Collect the snapshots of $f(x(t))$ into a matrix $F = (f(x_{t_1}), \dots, f(x_N))$.
2. Apply SVD to $F : F = U^F \Sigma(V^F)^T$
3. $U^f = (u_1^F, \dots, u_l^F)$.



Using DEIM to decide the indices:

Algorithm Discrete Empirical Interpolation Method (DEIM)

Input : POD basis $\{u_i^F\}_{i=1}^l$ for F

Output : $\bar{\phi} = [\phi_1, \dots, \phi_l]^T \in R^l$

1. $[\|\rho\|, \phi_1] = \max\{|u_1^F|\}$

2. $U^f = [u_1^F], P = [e_{\phi_1}], \bar{\phi} = [\phi_1]$

3. for $i = 2$ to l do

4. Solve $(P^T U^f) \alpha = P^T u_i^F$ for α , where $\alpha = (\alpha_1, \dots, \alpha_{i-1})^T$

5. $r = u_i^F - U^f \alpha$

6. $[\|\rho\|, \phi_i] = \max\{|r|\}$

7. $U^f \leftarrow [U^f \ u_i^F], P \leftarrow [P \ e_{\phi_i}], \bar{\phi} \leftarrow \begin{bmatrix} \bar{\phi} \\ \phi_i \end{bmatrix}$

8. end for



Come back to $V^T f(Vz(t))$:

$$f(Vz(t)) \approx U(P^T U)^{-1} P^T f(Vz(t)).$$

Finally,

$$V^T f(Vz(t)) \approx V^T \underline{U(P^T U)^{-1}} P^T f(Vz(t))$$

can be precomputed
before solving the ROM

$$P^T f(Vz(t)) = (f_{\phi_1}(Vz(t)), \dots, f_{\phi_l}(Vz(t)))^T$$

where $\tilde{x} = Vz(t)$.

Computation of $V^T f(Vz(t))$ during solving ROM is independent of n .



References

Quadratic MOR:

- [1] Yong Chen, “Model order reduction for nonlinear systems”, MIT master thesis, 1999.

Bilinearization MOR:

- [2] J. R. Phillips, “Projection Frameworks for Model Reduction of Weakly Nonlinear Systems”, Proc. IEEE/ACM DAC, 184-189, 2000.
- [3] Z. Bai, and D. Skoogh, “A projection method for model reduction of bilinear dynamical systems”, Linear Algebra Appl., 415: 406-425, 2006.
- [4] L. Feng and P. Benner, A Note on Projection Techniques for Model Order Reduction of Bilinear Systems, AIP Conf. Proc. 936: 208-211, 2007.



References

Variational analysis MOR:

- [5] J. R. Phillips, "Automated Extraction of Nonlinear Circuit Macromodels ", Proc. of IEEE Custom Integrated Circuits Conference, 451-454, 2000.
- [6] L. Feng, X. Zeng, Ch. Chiang, D. Zhou, Q, Fang "Direct nonlinear order reduction with variational analysis", Proc. of Design, Automation and Test in Europe Conference and Exhibition, 2:1316-1321, 2004.

Trajectory piece-wise linear (polynomial) MOR:

- [7] M. Rewienski and J. White, "A Trajectory Piecewise-Linear Approach to Model Order Reduction and Fast Simulation of Nonlinear Circuits and Micromachined Devices", IEEE Trans. Comput.-Aided Des. Integr. Circuits Syst., 22(2):155-170, 2003.
- [8] M. Rewienski and J. White, "Model order reduction for nonlinear dynamical systems based on trajectory piecewise-linear approximations ", Linear Algebra Appl., 415(2-3):426-454, 2006.



References

POD:

- [9] S. Volkwein, "Model reduction using proper orthogonal decomposition ", Lecture notes, June 7, 2010.
- [10] S. Schaturantabut and D. C. Sorensen, "Nonlinear model reduction via discrete empirical interpolation", SIAM J. Sci. Comput. 32(5): 2737-2764, 2010.

A very good book for nonlinear system:

- [11] W. J. Rugh, "Nonlinear system theory, the Volterra/Wiener Approach", The Johns Hopkins University Press, 1981.