

# Chapter 3



## Multicore and Multiprocessor Systems: Part III



# Open Multi-Processing (OpenMP)



This is OpenMP: The Mission

## Mission

*“The OpenMP Application Program Interface (API) supports multi-platform shared-memory parallel programming in C/C++ and Fortran on all architectures, including Unix platforms and Windows NT platforms. Jointly defined by a group of major computer hardware and software vendors, OpenMP is a portable, scalable model that gives shared-memory parallel programmers a simple and flexible interface for developing parallel applications for platforms ranging from the desktop to the supercomputer.”<sup>a</sup>*

---

<sup>a</sup>The Mission statement from <http://openmp.org/wp/about-openmp/>

## The OpenMP Architecture Review Board (ARB)

The ARB is a non-profit enterprise owning the OpenMP brand and responsible for overseeing, producing and approving the OpenMP standards.







# Open Multi-Processing (OpenMP)



What OpenMP can do for us

- **Easy shared memory parallel adaption of existing sequential codes**
- **Easy preservation of sequential implementations**











# Open Multi-Processing (OpenMP)



What OpenMP is NOT for!

- Distributed memory parallel systems (by itself)







# Open Multi-Processing (OpenMP)

## The Structure of the Standard

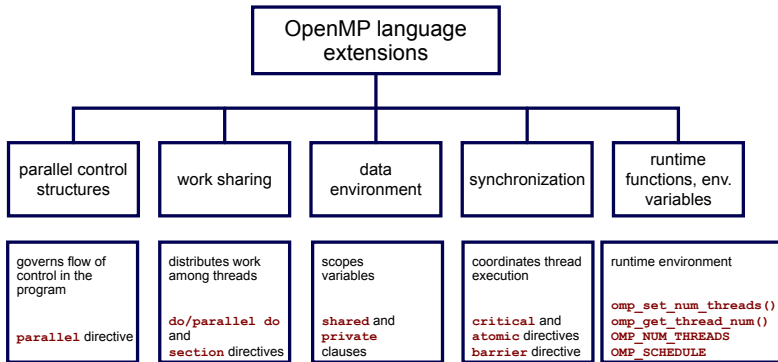


Figure: Classification of the OpenMP extensions by tasks of the elements<sup>4</sup>.

<sup>4</sup>Image Source: [http://commons.wikimedia.org/wiki/File:OpenMP\\_language\\_extensions.svg](http://commons.wikimedia.org/wiki/File:OpenMP_language_extensions.svg)



# Open Multi-Processing (OpenMP)



## The Structure of the Standard

The standard divides the extensions into four classes:

### ④ Directives:

**Basic control structures that initialize/end the parallel environments**



# Open Multi-Processing (OpenMP)



## The Structure of the Standard

The standard divides the extensions into four classes:

### ① **Directives:**

Basic control structures that initialize/end the parallel environments

### ② **Clauses:**

Fine tuning parameters added to the directives.

### ③ **Environment Variables:**

Variables in the calling shell used to control the parallel environment without recompilation.



# Open Multi-Processing (OpenMP)



## OpenMP directives

The `#pragma` directive was introduced in C89 as the universal method for extending the space of directives. It was further standardized in C99, where especially the token `STDC` was reserved for standard C extensions.

### Example (standard C `#pragma` usage)

In part 1 of the Scientific Computing lecture we have seen the floating point environment for, e.g., checking the exception flags in IEEE arithmetic:

```
#include <fenv.h>
#pragma STDC FENV_ACCESS ON
/* starting here the compiler needs to assume we are accessing the
floating point status and mode registers*/
```

# Open Multi-Processing (OpenMP)



## OpenMP directives

OpenMP is an extension in the sense of C89 and enabled by the

```
#pragma omp
```

preprocessor directive. It applies to the succeeding structural code block.

# Open Multi-Processing (OpenMP)



## OpenMP directives

OpenMP is an extension in the sense of C89 and enabled by the

```
#pragma omp
```

preprocessor directive. It applies to the succeeding structural code block.

Compilers that do not know the `omp` pragma simply ignore it. For the GNU C compiler (`gcc`) and the Intel<sup>®</sup> C compiler OpenMP support must be enabled by the `-fopenmp` switch. Otherwise the `omp` pragmas are ignored and the sequential code version is compiled.





# Open Multi-Processing (OpenMP)



## OpenMP directives

OpenMP is an extension in the sense of C89 and enabled by the

```
#pragma omp
```

preprocessor directive. It applies to the succeeding structural code block.

Compilers that do not know the `omp` pragma simply ignore it. For the GNU C compiler (`gcc`) and the Intel® C compiler OpenMP support must be enabled by the `-fopenmp` switch. Otherwise the `omp` pragmas are ignored and the sequential code version is compiled.

A list of compilers supporting OpenMP can be found at  
<http://openmp.org/wp/openmp-compilers/>

The `gcc` compiler suite implements OpenMP 3.1 starting from version 4.7. The 4.0 standard support in `gcc` has been completed in version 5.1 (April 22nd 2015).

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel

The `parallel` construct initializes a group of threads and starts parallel execution:

```
#pragma omp parallel [clause[[,]clause]...]
```

The clauses can be used to influence the behavior of the parallel execution. They will be explained later.

Available clauses for `parallel`:

- `if(scalar expression)`
- `num.threads(integer expression)`
- `default(shared| none)`
- `private(list)`
- `firstprivate(list)`
- `shared(list)`
- `copyin(list)`
- `reduction(operation:list)`

# Open Multi-Processing (OpenMP)



## OpenMP directives

### Example (A minimal OpenMP parallel “hello world” program)

```
#include <stdio.h>

int main(void)
{
  #pragma omp parallel
    printf("Hello, world.\n");
  return 0;
}
```

The example automatically lets OpenMP tune the number of threads used to the number of available processors. Afterward the parallel execution environment is started and all threads execute the `printf` statement.

# Open Multi-Processing (OpenMP)



## OpenMP directives: Loop

The `loop` construct specifies that the iterations of the loop should be distributed among the active threads.

```
#pragma omp for [clause[[,]clause]...]  
for loops
```

The `for`-loop construct needs to be used inside a structured code block of `parallel` construct.

Available clauses for `for`:

- `private(list)`
- `firstprivate(list)`
- `lastprivate(list)`
- `reduction(operator:list)`
- `schedule(kind[, chunk-size])`
- `collapse(n)`
- `ordered`
- `nowait`

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Loop

Since often the `parallel` environment is used to introduce a `for`-loop construction only, a shortcut `parallel for` exists for this special task

```
#pragma omp parallel for [clause[[,] clause]...]
```

With the exception of the `nowait` clause all clauses accepted by `parallel` and `for` can be used with `parallel for` with the identically same behaviors and restrictions.

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Loop

### Example (OpenMP parallel vector triad)

```
double triad(double *a, double *b, double *c, double *d, int length){
    int i,j;
    const int repeat=100;
    double start, end;

    get_waltime(&start);
    for (j=0; j<repeat; j++){
#pragma omp parallel for
        for (i=0 ; i<length; i++){
            a[i]=b[i] + c[i] * d[i];
        } /*end of parallel section*/
    }
    get_waltime(&end);
    return repeat*length*2.0 / ((end-start) * 1.0e6); /* return MFLOPS */
}
```

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Loop

### Example (OpenMP parallel vector triad)

```
double triad(double *a, double *b, double *c, double *d, int length){
    int i,j;
    const int repeat=100;
    double start, end;

    get_waltime(&start);
    for (j=0; j<repeat; j++){
#pragma omp parallel for
        for (i=0 ; i<length; i++){
            a[i]=b[i] + c[i] * d[i];
        } /*end of parallel section*/
    }
    get_waltime(&end);
    return repeat*length*2.0 / ((end-start) * 1.0e6); /* return MFLOPS */
}
```

Note that loop counters are protected automatically.

# Open Multi-Processing (OpenMP)



## OpenMP directives: Sections

When different tasks are to be distributed among the encountering team of threads the `sections` construct can be used

```
#pragma omp sections [clause[[,] clause]...]
{
  [#pragma omp section]
  structured code block
  [#pragma omp section]
  structured code block
  ...
}
```

Available clauses for `sections`:

- `private(list)`
- `firstprivate(list)`
- `lastprivate(list)`
- `reduction(operator:list)`
- `nowait`



# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Sections

Analogous to the `for` construct, also sections can be used only inside a `parallel` construct. The `parallel sections` construct merges them for easier use

```
#pragma omp parallel sections [clause[[,] clause]...]
{
  [#pragma omp section]
  structured code block
  [#pragma omp section]
  structured code block
  ...
}
```

Available clauses are those available for `parallel` and `sections` with the exception of `nowait`, as in the case of `for`.

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Sections

```
#include <omp.h>
#include <stdio.h>
#include <stdlib.h>
#define N      50

int main (int argc, char *argv[]) {
    int i, nthrd, tid;
    float a[N], b[N], c[N], d[N];

    /* Some initializations */
    for (i=0; i<N; i++) {
        a[i] = i * 1.5;
        b[i] = i + 42.0;
        c[i] = d[i] = 0.0;
    }
    /* Start 2 threads */
    #pragma omp parallel shared(a,b,c,d,nthrd) private(i,tid) num_threads(2)
    {
        tid = omp_get_thread_num();
        if (tid == 0) {
            nthrd = omp_get_num_threads();
            printf("Number_of_threads_=%d\n", nthrd);
        }
        printf("Thread_%d_starting...\n",tid);
    }
}
```

# Open Multi-Processing (OpenMP)

## OpenMP directives: Parallel Sections



```
#pragma omp sections
{
#pragma omp section
{
    printf("Thread_%d_doing_section_1\n",tid);
    for (i=0; i<N; i++) {
        c[i] = a[i] + b[i];
    }
    sleep(tid+2); /* Delay the thread for a few seconds */
} /* End of first section */

#pragma omp section
{
    printf("Thread_%d_doing_section_2\n",tid);
    for (i=0; i<N; i++) {
        d[i] = a[i] * b[i];
    }
    sleep(tid+2); /* Delay the thread for a few seconds */
} /* End of second section */
} /* end of sections */
printf("Thread_%d_done.\n",tid);
} /* end of omp parallel */
```

# Open Multi-Processing (OpenMP)



## OpenMP directives: Parallel Sections

```
/* Print the results */  
printf("c:␣");  
for (i=0; i<N; i++) {  
    printf("%.2f␣", c[i]);  
}  
printf("\n␣nd:␣");  
for (i=0; i<N; i++) {  
    printf("%.2f␣", d[i]);  
}  
printf("\n");  
exit(0);  
}
```

# Open Multi-Processing (OpenMP)



## OpenMP directives: Single

A construct that makes sure that a structured code block is executed by only one thread in a team of threads is given by the `single` directive.

```
#pragma omp single [clause[[,] clause]...]
```

Available clauses for the `single` construct are:

- `private(list)`
- `firstprivate(list)`
- `lastprivate(list)`
- `nowait`

# Open Multi-Processing (OpenMP)



## OpenMP directives: Single

### Example (OpenMP 3.1 Example A.14.1c)

```
#include <stdio.h>

void work1() {}
void work2() {}
void main()
{
  #pragma omp parallel
  {
    #pragma omp single
      printf("Beginning_work1.\n");
    work1();
    #pragma omp single
      printf("Finishing_work1.\n");
    #pragma omp single nowait
      printf("Finished_work1_and_beginning_work2.\n");
    work2();
  }
}
```

# Open Multi-Processing (OpenMP)



## OpenMP directives: Barrier

A synchronization construct that makes the threads wait until all threads in the team have reached this point and only then continues execution.

```
#pragma omp barrier
```

Note that all constructs that allow the `nowait` clause have an implicit barrier at their end. Still sometimes explicit synchronization is desirable.

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Classification

The OpenMP clauses we have seen above can be divided into two classes

- 1 **attribute clauses related to data sharing**
- 2 **clauses controlling data copying**



# Open Multi-Processing (OpenMP)



## OpenMP clauses: Classification

The OpenMP clauses we have seen above can be divided into two classes

- 1 **attribute clauses related to data sharing**
- 2 **clauses controlling data copying**
  - clauses usually take a list of arguments
  - lists are comma separated and enclosed by ( ).
  - all list items must be visible to the clause

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

Data sharing attributes of a variable in a `parallel` or `task` construct can be one of

- **predetermined**, e.g., loop counters in `for` or `parallel for` constructs are always `private`, `const` qualified variables are `shared`, more can be found in Section 2.9.1 of the OpenMP standard

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

Data sharing attributes of a variable in a `parallel` or `task` construct can be one of

- **predetermined**, e.g., loop counters in `for` or `parallel for` constructs are always `private`, `const` qualified variables are `shared`, more can be found in Section 2.9.1 of the OpenMP standard
- **explicitly determined** are those attributes where variables are referenced in a clause setting the attributes

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

Data sharing attributes of a variable in a `parallel` or `task` construct can be one of

- **predetermined**, e.g., loop counters in `for` or `parallel for` constructs are always `private`, `const` qualified variables are `shared`, more can be found in Section 2.9.1 of the OpenMP standard
- **explicitly determined** are those attributes where variables are referenced in a clause setting the attributes
- **implicitly determined**, are the attributes of variables referenced in a given construct but are neither predetermined nor explicitly specified

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

### `default (shared|none)`

- determines the default attributes of variables in the context of a `task` or `parallel` construct.
- defaults to `shared` when not explicitly given in a `parallel` construct
- all other (except `task`) constructs inherit the default from the enclosing construct if no `default` clause is given explicitly.

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

### `default (shared | none)`

- determines the default attributes of variables in the context of a `task` or `parallel` construct.
- defaults to `shared` when not explicitly given in a `parallel` construct
- all other (except `task`) constructs inherit the default from the enclosing construct if no `default` clause is given explicitly.

### `shared (list)`

Sets the data sharing attributes of all variables in `list` to be of `shared` type. That means the variable is considered to be in the shared memory of the team of threads.

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

```
private(list)
```

Each variable of the `list` is declared to be a private copy of the thread and not accessible from other threads in the team. It can not be applied to variables that are part of other variables. (elements in arrays or members of a structure).

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

```
private(list)
```

Each variable of the `list` is declared to be a private copy of the thread and not accessible from other threads in the team. It can not be applied to variables that are part of other variables. (elements in arrays or members of a structure).

```
firstprivate(list)
```

As above but additionally the value of the item in the list is initialized from the corresponding original item when the construct is encountered. The clause has a few more restrictions found in the standard.



# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

```
private(list)
```

Each variable of the `list` is declared to be a private copy of the thread and not accessible from other threads in the team. It can not be applied to variables that are part of other variables. (elements in arrays or members of a structure).

```
firstprivate(list)
```

As above but additionally the value of the item in the list is initialized from the corresponding original item when the construct is encountered. The clause has a few more restrictions found in the standard.

```
lastprivate(list)
```

As `private` but causes the original item to be updated after the end of the region from the last iterate of the enclosed loop or the lexically last section in a sections region.

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

### `reduction (operator:list)`

Accumulates all items of the list into a private copy according to the given `operator` and then combines it with the original instance.

|                    |   |                         |                  |
|--------------------|---|-------------------------|------------------|
| <code>+</code>     | <code>(0)</code>  | <code> </code>          | <code>(0)</code> |
| <code>*</code>     | <code>(1)</code>  | <code>^</code>          | <code>(0)</code> |
| <code>-</code>     | <code>(0)</code>  | <code>&amp;&amp;</code> | <code>(1)</code> |
| <code>&amp;</code> | <code>(~0)</code>   | <code>  </code>         | <code>(0)</code> |
| <code>max</code>   | <code>(Least number in reduction list item type)</code>   |                         |                  |
| <code>min</code>   | <code>(Largest number in reduction list item type)</code> |                         |                  |

**Table:** Operators for `reduction` with initialization values in `()`

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Sharing

### Example (OpenMP reduction minimal example)

```
#include <omp.h>
#include <stdio.h>
#include <stdlib.h>

int main (int argc, char *argv[]) {
    int    i, n;
    float  a[100], b[100], sum;

    /* Some initializations */
    n = 100;
    for (i=0; i < n; i++)
        a[i] = b[i] = i * 1.0;
    sum = 0.0;

    #pragma omp parallel for reduction(+:sum)
        for (i=0; i < n; i++)
            sum = sum + (a[i] * b[i]);
    printf("Sum = %f\n", sum);
}
```

# Open Multi-Processing (OpenMP)



## OpenMP clauses: Data Copying

The following are cited from OpenMP 3.1 API C/C++ Syntax Quick Reference Card:

“These clauses support the copying of data values from private or threadprivate variables on one implicit task or thread to the corresponding variables on other implicit tasks or threads in the team.”

`copyin(list)`

“Copies the value of the master thread’s threadprivate variable to the threadprivate variable of each other member of the team executing the parallel region.”

`copyprivate(list)`

“Broadcasts a value from the data environment of one implicit task to the data environments of the other implicit tasks belonging to the parallel region.”

# Open Multi-Processing (OpenMP)



## OpenMP Environment Variables

Environment variables can be used to influence the behavior of an OpenMP process without recompiling the binary at runtime.

# Open Multi-Processing (OpenMP)



## OpenMP Environment Variables

Environment variables can be used to influence the behavior of an OpenMP process without recompiling the binary at runtime.

### OMP\_SCHEDULE

Specifies the runtime schedule type. Available values are `static`, `dynamic`, `guided`, or `auto` together with an optional `chunk size`.

# Open Multi-Processing (OpenMP)



## OpenMP Environment Variables

Environment variables can be used to influence the behavior of an OpenMP process without recompiling the binary at runtime.

### OMP\_SCHEDULE

Specifies the runtime schedule type. Available values are `static`, `dynamic`, `guided`, or `auto` together with an optional `chunk size`.

### OMP\_NUM\_THREADS

Must be set to a list of positive integers determining the numbers of threads at the corresponding nested level.

# Open Multi-Processing (OpenMP)



## OpenMP Environment Variables

Environment variables can be used to influence the behavior of an OpenMP process without recompiling the binary at runtime.

### OMP\_SCHEDULE

Specifies the runtime schedule type. Available values are `static`, `dynamic`, `guided`, or `auto` together with an optional `chunk size`.

### OMP\_NUM\_THREADS

Must be set to a list of positive integers determining the numbers of threads at the corresponding nested level.

### OMP\_PROC\_BIND

The value of this variable must be `true` or `false`. It determines whether threads may be moved between processors at runtime.



# Open Multi-Processing (OpenMP)



## OpenMP Environment Variables

Environment variables can be used to influence the behavior of an OpenMP process without recompiling the binary at runtime.

### OMP\_SCHEDULE

Specifies the runtime schedule type. Available values are `static`, `dynamic`, `guided`, or `auto` together with an optional `chunk size`.

### OMP\_NUM\_THREADS

Must be set to a list of positive integers determining the numbers of threads at the corresponding nested level.

### OMP\_PROC\_BIND

The value of this variable must be `true` or `false`. It determines whether threads may be moved between processors at runtime.

More environment variables can be found in Section 4 of the OpenMP standard.

# Open Multi-Processing (OpenMP)



## OpenMP runtime library functions

We only treat thread and processor number related functions

```
void omp_set_num_threads(int num_threads)
```

Determines the number of threads in subsequent parallel regions that do not specify a `num_threads` clause.

```
int omp_get_num_threads(void)
```

Returns the number of threads in the current team.

# Open Multi-Processing (OpenMP)



## OpenMP runtime library functions

```
int omp_get_max_threads(void)
```

Provides the maximum number of threads that could be used in a subsequent `parallel` construct.

```
int omp_get_thread_num(void)
```

Returns the thread ID of the current thread. IDs are integers from zero (the master thread) to the number of threads in the team minus one.

```
int omp_get_num_procs(void)
```

returns the number of processors available to the program.

More runtime library functions and detailed descriptions can be found in Section 3 of the OpenMP standard.

# Open Multi-Processing (OpenMP)



## OpenMP runtime library functions

### Example (Hello World revisited)

```
#include <omp.h>
#include <stdio.h>
#include <stdlib.h>

int main (int argc, char *argv[]) {
    int th_id, nthreads;
#pragma omp parallel private(th_id)
    {
        th_id = omp_get_thread_num();

        printf("Hello World from thread_%d\n", th_id);
#pragma omp barrier
        if ( th_id == 0 ) {
            nthreads = omp_get_num_threads();
            printf("There are %d threads\n", nthreads);
        }
    }
    return EXIT_SUCCESS;
}
```

# Open Multi-Processing (OpenMP)



## OpenMP runtime library functions

Two important rules of thumb:

In case of nested loops it is usually best to apply the parallelization to the outermost possible loop.

# Open Multi-Processing (OpenMP)

## OpenMP runtime library functions



Two important rules of thumb:

In case of nested loops it is usually best to apply the parallelization to the outermost possible loop.

It is in general a good idea to first optimize the sequential code and only then add parallelism to further increase the speed of execution.